

# NEW HOLLAND TT


TT35 | TT40 | TT45



# SPECIFICATIONS

MODELS		TT35	TT40	TT45
<b>Engine</b>				
Engine power	[hp(CV)]	35	42	47
Rated speed	(rpm)	2000		2300
No. of cylinders		3		
Bore x stroke	(mm)	88,9 x 127	91,4 x 127	
Displacement	(cm <sup>3</sup> )	2365	2500	
Air cleaner	(mm)	Wet air cleaner with underhood centrifugal pre cleaner		
Fuel filters		Dual filter with optional water trap		
Fuel tank capacity	(l)	62		
Aspiration		Naturally aspirated		
<b>Transmission</b>				
Type		Constant mesh		
Speeds	(F x R)	8 x 2 and optional 8 x 8		
Gear levers		Side shift		
Forward speed range	(km/h)	2,83 - 31,12		3,25 - 35,79
Clutch type		Single clutch or optional double clutch with independent PTO		
<b>PTO</b>				
PTO	(rpm)	Standard 540 RPM with Ground Speed PTO and optional 540/540E RPM with Ground Speed PTO		
PTO	(hp)	32.5	37.5	42.41
<b>Hydraulics</b>				
Controls		Position control, drop rate control, mix control, sensivity knob, tap off and Lift-O-Matic™		
Maximum lift capacity at ball ends	(kg)	1100 or optional 1500		
Max. number of remote valves		2		
<b>Steering</b>				
Type		Mechanical steering and power steering options		
<b>Rear axle</b>				
Type		Epicyclic reduction with straight axle (Heavy duty)		
<b>Brakes</b>				
Type		Wet brakes		
<b>Electricals</b>				
Differential lock		●		
Battery		75 Ah or optional 88 Ah		
Others		7 pin trailer socket, rear work light, halogen work lamps, direction indicator		
Instrument cluster		Analogue panel with rpm meter, digital hourmeter, fuel gauge and water temperature gauge and warning lights for battery charging and oil pressure		
<b>Dimensions &amp; weights*</b>				
A - Wheel base 2WD	(mm)	1910		
A - Wheel base 4WD	(mm)	2025		
B - Ground clearance under front axle 4WD	(mm)	370		
C - Overall length incl. front weight 2 & 4WD	(mm)	3440		
D - Overall width 2 & 4WD	(mm)	1700		
E - Height to top of Exhaust 2 & 4WD	(mm)	2300	2300	2275
F - Height to top of steering wheel 2 & 4WD	(mm)	1620	1620	1570
Weight without ballast 2WD	(kg)	1645	1645	1660
Weight without ballast 4WD	(kg)	1738	1738	1760

● Standard \* Above dimensions are based on tractors with 12.4x28 rear tyre size expect 13.6x28 size on TT45 2WD

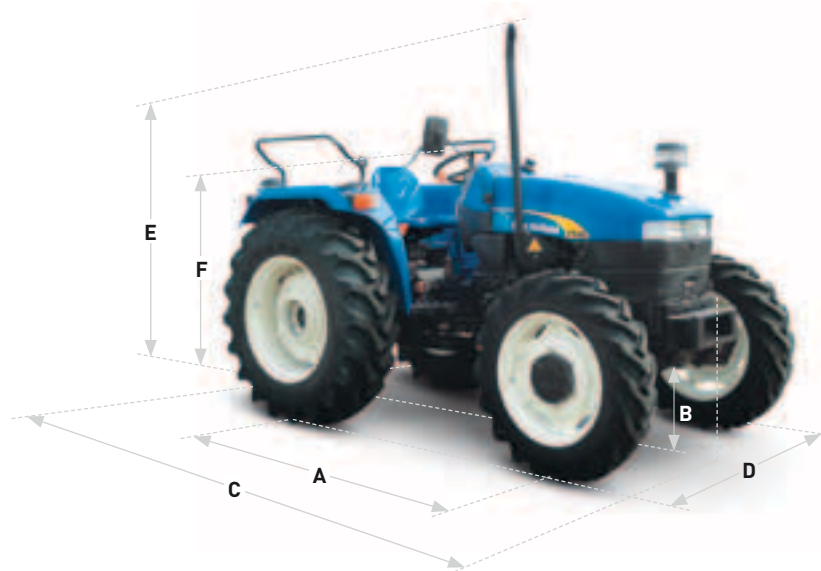

Visit our website:  
[www.newholland.com](http://www.newholland.com)  
 Send us an e-mail:  
[africa.topservice@newholland.com](mailto:africa.topservice@newholland.com)  
[middleEast.topservice@newholland.com](mailto:middleEast.topservice@newholland.com)

